

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International publication date
14 April 2005 (14.04.2005)

PCT

(10) International publication number
WO 2005/032917 A1


- (51) International patent classification⁷: B62D 21/17, Steinbacher Strasse 34/1, 71570 Oppenweiler-Zell (DE).
- (21) International application number: PCT/DE2004/011276
- (22) International filing date: 8 October 2004 (08.10.2004)
- (25) Language of filing: German
- (26) Language of publication: German
- (30) Data relating to the priority:
103 47 230.4 8 October 2003 (08.10.2003) DE
- (71) Applicant (for all designated States except US): BEHR GMBH & CO. KG [DE/DE]; Mauserstrasse 3, 70469 Stuttgart (DE).
- (72) Inventor; and
- (75) Inventor/Applicant (US only): WOLF, Walter [DE/DE];
- (74) Attorney: BEHR GMBH & CO. KG; Intellectual Property, G-IP, Mauserstrasse 3, 70469 Stuttgart (DE).
- (81) Designated states (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated states (unless otherwise indicated, for every kind of regional protection available): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD,

[continued on next page]

As printed

(54) Title: STRUCTURAL ELEMENT, USE OF A STRUCTURAL ELEMENT AND METHOD FOR PRODUCING A STRUCTURAL ELEMENT, PARTICULARLY A CROSS MEMBER FOR A VEHICLE

(54) Bezeichnung: BAUTEIL, VERWENDUNG EINES BAUTEILS SOWIE VERFAHREN ZUR HERSTELLUNG EINES BAUTEILS, INSBESONDERE EINES QUERTRÄGERS FÜR EIN FAHRZEUG

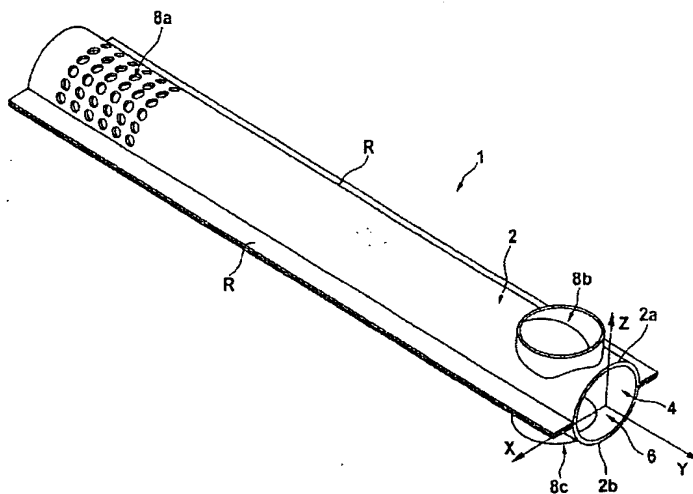

(57) Abstract: The invention relates to a structural element (1), particularly a cross member, for placing between A pillars of a motor vehicle, comprising a base body (2), which is provided, in essence, as a hollow profile, and which, inside, has a plastic core (4) that forms at least one channel (6), whereby the base body (2) has an at least partially perforated design.

[continued on next page]

WO 2005/032917 A1

SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17

- of inventorship (Rule 4.17(iv)) for the following designation US

Published:

- With International Search Report.
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For an explanation of the two-letter codes and the other abbreviations, reference is made to the explanations ("Guidance Notes on Codes and Abbreviations") at the beginning of each regular edition of the PCT Gazette.